




Track Safety Light Post Mount

Model 6760A rev A
02/04/2013



MOUNT ASSEMBLY - Remove the foam packaging material. The two 9/16" hex nuts should be on the U-bolt with the saddle on the other side of the housing which will allow the mounting post to pass through the hole.

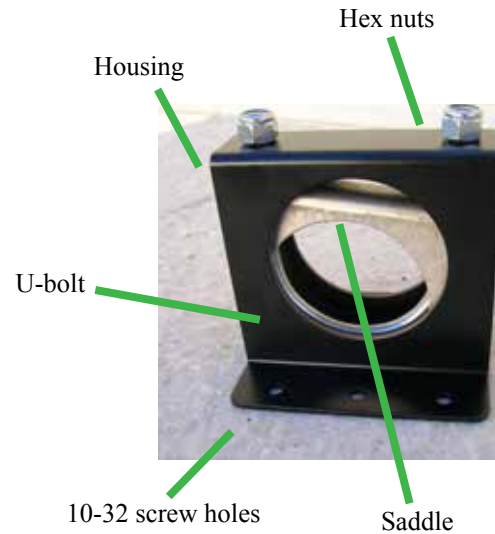

MOUNT COMPONENTS - The mount package contains one U-bolt with two nuts, one U-bolt saddle, one housing and four #10-32x0.375" stainless steel screws.



Using the four 10-32x0.375" screws, attach the housing to the array hole pattern on the back of the Track Safety Light.



Slide the post/pipe through the hole and tighten the hex nuts

- Key Specs:**
- | | |
|-------------------------------|----------------------|
| Pipe/Post size limits - round | 2" OD to 2.5" OD |
| - square | 1.4" to 1.75" |
| Material - Mount | Powder Coat Aluminum |
| - Clamp | Stainless Steel |
- Tools Required:**
- 9/16" hex head wrench
 - #2 Philips Screwdriver